


- Programmable logic controller (PLC), CODESYS® advanced programming environment (free of charge)
- Programming according to INTERNATIONAL STANDARD IEC 61131-3
- Embedded GSM 2G/4G modem
- Dual-SIM technology (passive) – access to 2 independent GSM networks ensures superior availability
- 16 binary inputs (galvanic isolation)
- 12 binary outputs, selectively configurable as inputs (galvanic isolation)
- 4 analog inputs 4–20 mA (galvanic isolation)
- 2 analog inputs 0–10 V (w/o galvanic isolation)
- Ethernet port 10Base-T/100Base-TX
- RS-232/485 serial port for external devices (galvanic isolation)
- RS-232 port with 5 V feeding for operator panels
- OLED graphic display (128x64 pixels)
- Diagnostic LEDs
- Battery buffered power supply (SLA battery support)
- Data logger with 0,1 sec resolution (SD card support)

* dedicated firmware

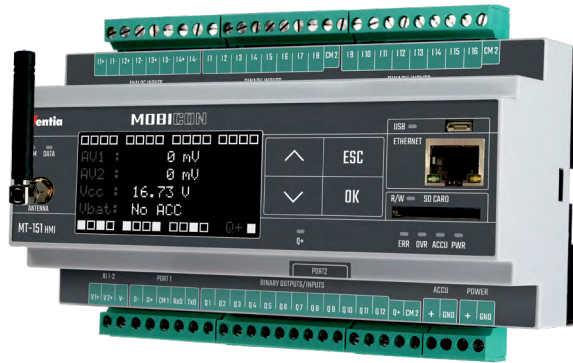

- Real-Time Clock (RTC)
- FlexSerial – programmable handling of non-standard serial protocols
- Standard communication protocols (Modbus RTU, Modbus TCP, IEC 60870-5-104*)
- Remote configuration, programming, diagnostics and firmware upgrade over network (OTA)
- 3-years warranty

MT-151 HMI v3 LTE is a family of new generation telemetry controllers for demanding tasks and applications. MT-151 HMI v3 LTE model is a professional, industrial design combining functionality of programmable logic controller, data logger, protocol converter and wireless communication interface packet transmission over 2G/4G networks or/and Ethernet interface. CODESYS combines advanced technical features with easy to use environment.

Dual-SIM technology ensures superior level of 2G/4G networks availability, providing redundant channel of data transmission. Ethernet port provides powerful capabilities of integration with other devices and systems of the user. Graphic display is a convenient user interface for local diagnostics, supervision and monitoring – without use of external operator panel or portable PC. With compact, robust design, integral GSM modem, attractive technical features and easy to use configuration tools the MT-151 HMI v3 LTE controller is an optimal solution for demanding wireless telemetry, control, diagnostic, surveillance and alarm systems.

Resources:


- CODESYS RUNTIME SYSTEM (RTS) 256 kB FLASH memory, 64 kB RAM
- Creating user programs using free CODESYS Development System (in accordance with IEC 61131) – with debug option
- 16 optoisolated binary/counter inputs 12/24 V DC (I1 – I16), positive logic
- 12 optoisolated binary outputs 12/24 V DC (Q1 – Q12), positive logic – selectively configurable as inputs
- 4 optoisolated analog inputs 4–20 mA (accuracy 0,2%, 15-bit resolution @ 1 sec interval) with configurable hysteresis and filtration
- 2 single-ended analog inputs 0-10 V
- Ethernet port 10Base-T/100Base-TX
- Isolated RS-232/485 serial port

* option

- RS-232 serial port with 5 V / 500 mA feeding
- micro USB (AB) port for local configuration and programming
- Interface for backup 12 V SLA battery – charging support
- 2 SIM holders – Dual-SIM support (2G/4G network redundancy)
- OLED graphic display (128x64) and status LEDs
- Embedded temperature sensor
- Internal flags and registers for user application program
- Firmware Flash memory with remote update capability
- Data and Event logger supporting SD card
- RTC with external synchronization functions

Functionality:

- Transmission modes:
 - » 2G/4G – packet transmission
 - » SMS
 - » e-mail (without SSL)
- Access to module resources using standard protocols Modbus RTU and Modbus TCP, Open, Open2
- Intelligent packet routing and Multimaster support in Modbus mode
- Binary inputs configurable as counting inputs (upto 2 kHz) – I1-I4
- Programmable control logic using I/Os, timers, counters, flags and registers for triggering events (data transmission/recording, SMS transmission, e-mail transmission, setting outputs and internal registers, etc.)
- Event based transmission (unsolicited messaging) triggered by change of binary input state, internal flag state, by reaching alarm level of analog input, by true condition
- Configurable SMS messages triggered by alarms and scheduled



16-28DI
/12DO

6AI



DIN RAIL

RS-232

RS-232/485

4G



- Dynamic fields in SMS text
- Configurable alarm levels, hysteresis, deadband and filtration for analog inputs
- Data and event recording on SD card with 0,1 sec resolution
- Transmission of data from external devices connected to RS-232/485 serial port
- 5 V feeding provided for external device connected to RS-232 serial port (eg. operator panel, GPS receiver)
- Configurable events based on mirrored resources of external devices
- Remote configuration and programming over network
- Configurable access security – list of authorized IPs and ph. numbers, optional password
- DIN rail mounting
- Supply voltage 12/24 V DC (24 V DC in case of using connected external battery)
- Built-in management of external SLA backup battery
- Built-in advanced auto-diagnostics
- Detachable terminal blocks

General

Dimensions (L x W x H)	157 x 86 x 58 mm
Weight	382 g
Fixing	DIN Rail 35 mm
Operating temperature	-20 do +65 °C
Operating humidity	up to 95%, noncondensing
Protection class	IP20

Modem

Modem type	SIMCom A7672G
Region	global
2G	850/900/1800/1900 MHz
4G (LTE Cat 1)	Band: 1, 2, 3, 4, 5, 7, 8, B12, 13, 17, 18, 19, 20, 25, 26, 28, 38, 39, 40, 41, 66
External antenna socket	50Ω, SMA-F

Inputs I1 – I16*

Input voltage range	0 – 30 V
Input current	2,4 mA
Input voltage ON (1)	> 9,4 V
Input voltage OFF (0)	< 8,4 V

* according to IEC 61131-2 for switch type 1 and 3

Inputs Q1 – Q12*


Maximum input voltage	30 V
Input current	2,4 mA
Input voltage ON (1)	>9,4 V
Input voltage OFF (0)	<8,4 V

* according to IEC 61131-2 for switch type 1 and 3

Power supply

DC (nom. 12/24 V)	10,8 – 30 V		
Input current (@ 24 VDC)	Idle 0,06 A	Active 0,25 A	Max. 1,00 A

Drawings and dimensions (all dimensions in milimeters)

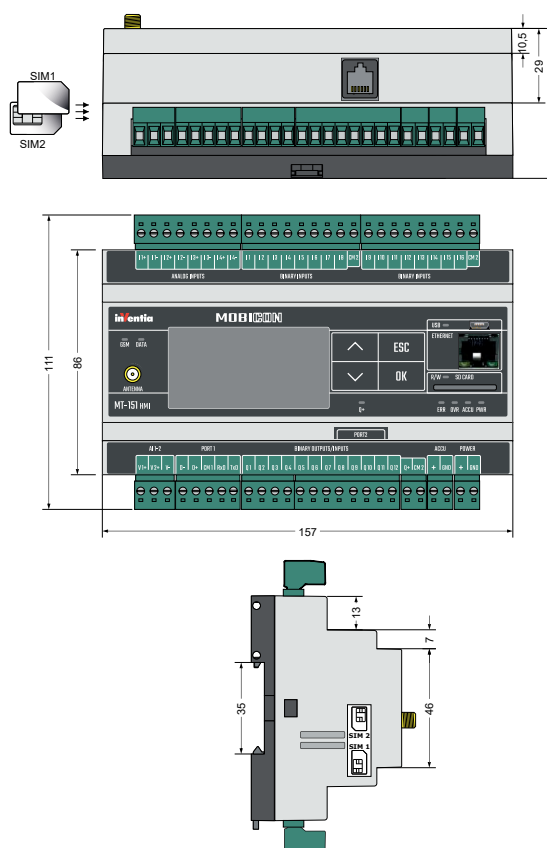

Analog inputs 0 – 10 V (2)

Input voltage range	0 – 10 V
Maximum input voltage	20 V
Input impedance	197 kΩ typ.
A/D converter resolution	16 bits
Accuracy (@ 25 °C)	0,5 %

Outputs Q1 – Q12

Maximum output current	100 mA
Voltage drop @ 100 mA	<0,5 V
OFF state current	<100 μA

Analog inputs 4 – 20 mA (4)

Input current range	4 – 20 mA
Maximum input current	50 mA
Dynamic input impedance	55 Ω typ.
Voltage drop @ 20 mA	< 5 V
A/D converter resolution	15 bits
Accuracy (@ 25 °C)	0,2 %